

**Standard Features**

- Single boiler system
- Lever operated groups
- Turn style steam knobs








**Additional Cost Features**

- Cool-touch steam wands
- Propane Gas Kit sold separately - not UL approved

**Color Options**

- Black/Stainless Steel
- Light Blue (2 Group Only)




	AL1 	AL2 	AL3 
Total Wattage	2,000 watt	2,600/4,400 watt	5,000 watt
Heating Element	2,000 watt	2,600/4,400 watt	5,000 watt
Boiler	6 ltr	10.5 ltr	17 ltr
Net Weight	121 lbs	154 lbs	194 lbs
Approx Ship Weight	200 lbs	230 lbs	270 lbs
Measurements W x D x H	23.2" x 22 x 23	31.5" x 22" x 23"	41" x 22" x 23"
Power	110 volt/16.7 amps  NEMA L5-30P	110 volt/21.7 amps 220 volt/19.1 amps  NEMA L5-30P  Nema L6-30	220 volt/ 21.7 amps  Nema L6-30

**Water Requirements**

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

**Drain Requirements**

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

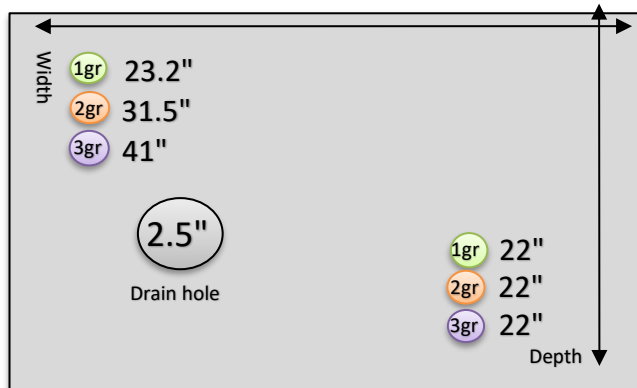



## Standard Features

- Single boiler system
- Raised groups
- 6 programable, volumetric dosing touch pads
- Preinfusion technology
- Cup warmer
- Lever-switch steam knobs
- Hot water dispenser with cool-water mixing valve








## Additional Cost Features

- Auto-steam
- Cool-touch steam wands

## Color Options

- Black/Stainless Steel
- Chrome



	SAE 1 	SAE 2 	SAE 3 
<b>Total Wattage</b>	2,330/2,930 watt	4,800 watt	5,350 watt
<b>Heating Element</b>	2,000/2600 watt	4,400 watt	5,000 watt
<b>Boiler</b>	6 ltr	10.5 ltr	17 ltr
<b>Net Weight</b>	126 lbs	159 lbs	195 lbs
<b>Approx Ship Weight</b>	200 lbs	230 lbs	270 lbs
<b>Measurements W x D x H</b>	23.2" x 22 x 22.8	31.5" x 22" x 22.8"	41" x 22" x 22.8"
<b>Power</b>	110 volt/ 19.4 amps 220 volt/ 11.3 amps	220 volt/21.4 amps	220 volt/ 23.2 amps
	 NEMA 6-20P  Nema L6-30	 Nema L6-30	 Nema L6-30

**Water Requirements**

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

**Drain Requirements**

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

